


#14 THW LOCATING WIRE
(SOLID COPPER WIRE
WITH BLUE COATING)

PIG TAIL WIRE AFTER
PASSING THROUGH SPLIT BOLT

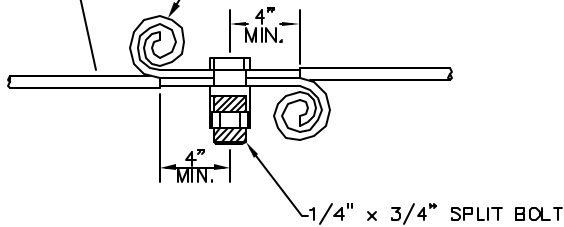

NOTES:

1. THE ENDS OF ALL LOCATING WIRES, WHETHER THEY ARE SPLICED, CONNECTED, OR TERMINATED, SHALL HAVE THE LAST THREE INCHES PIG TAILED AS DETAILED HEREON.
2. AFTER INSTALLATION OF THE LOCATING WIRE THE SYSTEM SHALL BE SUBJECTED TO TESTING, IN THE PRESENCE OF CITY UTILITIES STAFF PRIOR TO BACKFILL, IN ORDER TO THAT THE SYSTEM IS FUNCTIONAL.

LOCATING WIRE SPLICING

NOT TO SCALE



City of Leesburg Standard Details



**FARNER
BARLEY**
AND ASSOCIATES, INC.

350 North Sholar Avenue O Tavares, Florida 32778 ☎ (352) 343-8481

▲ ENGINEERS
▲ SURVEYORS
▲ PLANNERS

April 2004

Detail G-8